



SafeScape® S7000

Fire Rating

Max Width

Max Draw

180 minutes

UNLIMITED


7 metres

SafeScape® S7000 Series



The Safescape® Series fire door systems are available in both manual or motor operated designs and with or without swing type egress doors. S7000 Series doors are side acting therefore ideal for openings in fire walls where headroom is limited. The side activated design enables these fire doors to navigate around tight curves and contoured openings.

When in the stored fire-ready position the entire assembly retracts into a side pocket in the fire rated corridor this is approximately 175mm wide.

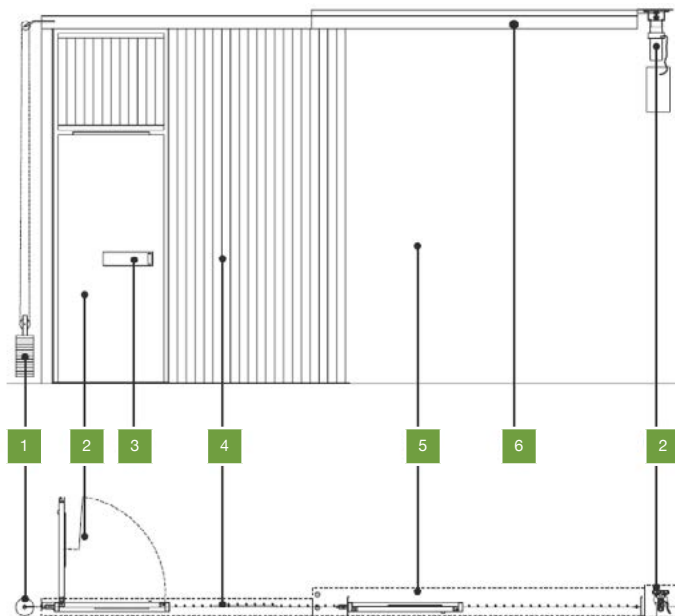

- 1 Counterbalance
- 2 Swinging Egress Door
- 3 Fire exit Hardware
- 4 Curtain Slats
- 5 Fire Rated Pocket
- 6 Head Track
- 7 Fire Door Motor Operator

Ratings

Up to 3-hour rated to UL 10B
Smoke & Draft labeled UL 1784

Egress

Fixed complying swing doors when required

Finishes

McKeon Sterling Gray
Powder coat
Stainless steel

Model	Open	Self-Close	Egress	Function
S7200	Manual Push- open	Fail-Safe Mechanical	N/A	Side Sliding
S7400	Manual Push-open	Fail-Safe Mechanical	1 Complying Swing Door	Side Sliding
S7500	Manual Push-open	Fail-Safe Mechanical	2 Complying Swing Door	Side Sliding
S7600	Auto-Set® Power Operator	Fail-Safe Mechanical	NA	Side Sliding
S7700	Auto-Set® Power Operator	Fail-Safe Mechanical	1 Complying Swing Door	Side Sliding
S7901-S7918 ¹	Auto-Set® Power Operator	Fail-Safe Mechanical	Multiple Complying Swing Doors	Side Sliding

¹ The last two digits of the model number indicate the number of swing doors.

Benefits

- Narrow side pocket requirement
- Door can navigate around tight curves
- Egress doors can be located anywhere along the opening
- Floor track not always required. Consult Greene Fire for advice

Operation

Auto-Set® automatic resetting
Fail-Safe Design - automatic self-closing mechanism does not require power operation
Manual operation for assemblies up to 3m x 3m

